arXiv:1304.5944v2 [quant-ph] 24 Apr 2013

Efficient atomic clocks operated with several atomic ensembles

J. Borregaard[1] and A. S. Sørensen[1]
[1]*QUANTOP, Niels Bohr Institute, University of Copenhagen,*
Blegdamsvej 17, DK-2100 Copenhagen , Denmark
(Dated: April 25, 2013)

Atomic clocks are typically operated by locking a local oscillator (LO) to a single atomic ensemble. In this article we demonstrate a scheme where the LO is locked to several atomic ensembles instead of one. This results in an exponential improvement compared to the conventional method and provides a stability of the clock scaling as $(\alpha N)^{-m/2}$ with N being the number of atoms in each of the m ensembles and α is a constant depending on the protocol being used to lock the LO. We find an improvement for $N \geq 20$ for clocks operated with the conventional Ramsey protocol and $N \geq 7$ for clocks operated with a more efficient, adaptive measurement strategy.

PACS numbers: 06.30.Ft, 03.65.Yz, 03.65.Ud, 06.20.Dk

Atomic clocks have been subject to extensive investigations due to the importance of very precise time measurements in a broad range of areas in physics. The resolution of current atomic clocks is limited by the quantum noise of the atoms, which leads to the standard quantum limit where the resolution scales as $1/\sqrt{N}$ with N being the number of atoms [1, 2]. Various ways of improving the resolution have been suggested such as using entangled states with reduced atomic noise [3–6] to push the resolution to the Heisenberg limit where it scales as $1/N$ [7–12]. Another approach to increasing the stability is to use optical atomic clocks where the higher operating frequency leads to an improved stability [13–17]. Since an atomic clock is typically operated through Ramsey spectroscopy [18] the resolution can however also be enhanced by increasing the Ramsey time T giving rise to an improvement scaling as $1/\sqrt{T}$ [19–21]. For clocks with trapped atoms, where there are no other limitations, T becomes limited only by the decoherence in the system. In practice this decoherence often originates from the frequency oscillations of the local oscillator (LO) used to drive the atomic clock transition [20]. Hence instead of the advanced ideas discussed above the stability can also be increased by simply devising methods to increase the Ramsey period by stabilizing the LO.

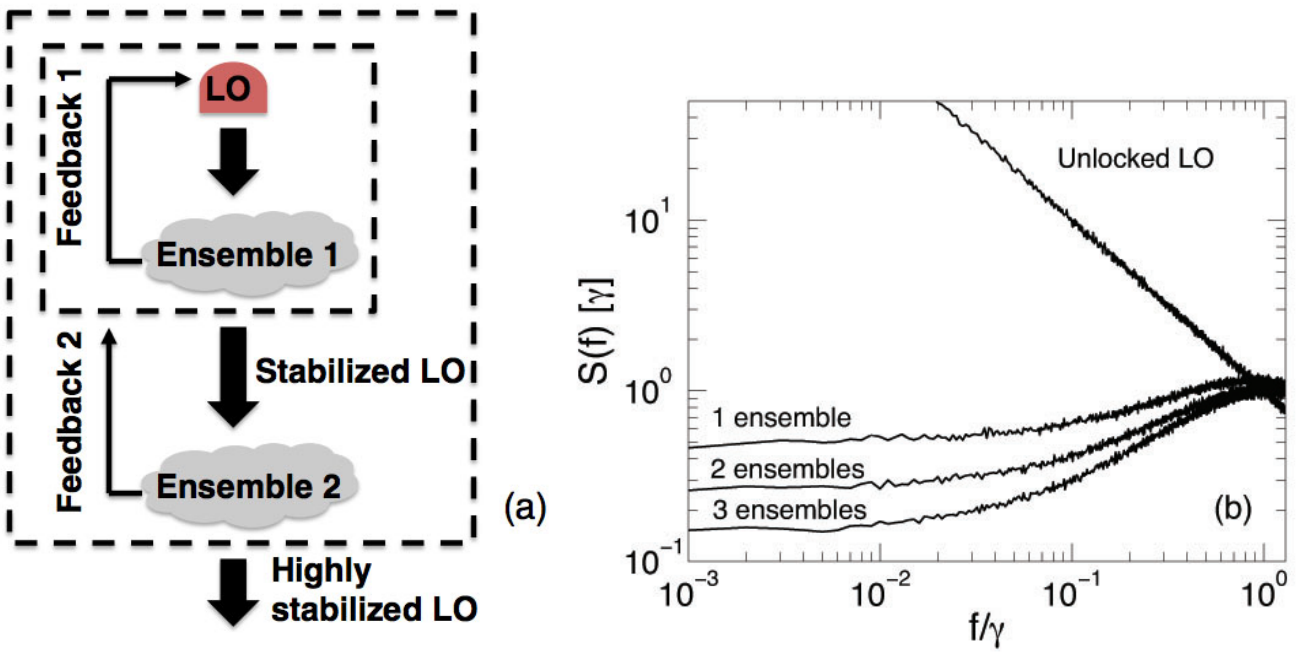

FIG. 1. (Colour online) (a): Illustration of the idea behind the scheme of locking the LO using several ensembles (a). The feedback of the first ensemble stabilizes the LO such that the second ensemble can be operated with a longer Ramsey time. The feedback from the second ensemble then further stabilizes the LO. (b): Numerical simulation of the noise of the LO when locked to between 1 and 3 ensembles. The data was simulated as described in the text for $N = 20$ and $T_1 = 0.1/\gamma$. The first feedback lowers the noise of the LO and makes the spectrum white even though the unlocked LO was assumed to be subject to $1/f$ noise. The second and third feedbacks further lowers the noise of LO by a constant factor.

In this letter we suggest a scheme where the frequency of the LO is locked to the atomic transition using several ensembles of atoms. This procedure allows increasing the Ramsey period each time another ensemble is used. As a result we find that the stability of the clock can increase exponentially with the number of ensembles. Fig. 1(a) illustrates the general idea behind the scheme. The feedback of the first ensemble locks the frequency of the LO thus reducing the noise to the atomic noise of the ensemble. Having reduced the noise in the LO, the second ensemble can be operated with a longer Ramsey time and through a second feedback loop the noise of the LO can be further reduced as shown in the simulation in Fig. 1(b) (details of the simulation are given later). The procedure can be extended to any number of ensembles and for uncorrelated atoms the stability of the LO will scale as $\sqrt{\gamma}(\gamma T_1 N)^{-m/2}$ where m is the number of ensembles (each with N atoms), γ is a parameter characterizing the frequency fluctuations of the unlocked LO, and T_1 is the smallest Ramsey time in the setup i.e. that of the first ensemble. Hence the scheme can provide an exponential improvement in the stability with the total number of atoms. In order for the clock to be stable we need $\gamma T_1 \ll 1$ and hence the protocol requires a minimum number of atoms to improve the performance. With the conventional Ramsey protocol we find that the scheme works for a minimum ensemble size of $N = 20$ atoms. To further optimize the performance of the scheme we study an adaptive measurement protocol for estimating the LO frequency offset [22], which extends the applicability of the scheme down to ensembles with only 7 atoms. This makes the scheme relevant for atomic clocks based on trapped ions, which are typically constructed with only a few ions e.g. the ion clock in Ref. [19] was constructed with exactly $N = 7$.

We will now describe the locking of the LO to the atomic transition using only two atomic ensembles operated with different Ramsey times. The idea described here can then easily be extended to a scheme with several ensembles. We model an ensemble of N atoms as a collection of spin-1/2 particles and define the total angular momentum $\vec{J} = \sum_{i=1}^{N} \vec{S}_i$ where $\vec{S}_i$ is the spin-vector of the i'th atom. We define the angular momentum operators $\hat{J}_x, \hat{J}_y$ and $\hat{J}_z$ in the usual way and initially the atoms are pumped to have $\langle \vec{J} \rangle$ along the z-direction, $\langle \hat{J}_x \rangle = \langle \hat{J}_y \rangle = 0$. In Ramsey spectroscopy the atoms are illuminated by a near-resonant $\pi/2$-pulse from the LO, followed by the Ramsey time T of free evolution, and finally another near-resonant $\pi/2$-pulse is applied to the atoms. The Heisenberg evolution of the operators $\hat{J}_x, \hat{J}_y$, and $\hat{J}_z$ is $\hat{J}_1 = \hat{J}_x, \hat{J}_2 = \sin(\delta\phi)\hat{J}_y - \cos(\delta\phi)\hat{J}_z$, and $\hat{J}_3 = \cos(\delta\phi)\hat{J}_y + \sin(\delta\phi)\hat{J}_z$ where $\delta\phi = \delta\omega T$ is the acquired phase of the LO relative to the atoms. At the end of the Ramsey sequence $\hat{J}_3$ is measured and used to make an estimate $\delta\phi^e = -\arcsin(\hat{J}_3/J)$ of $\delta\phi$ where $J = N/2$. The feedback loop steers the frequency of the LO towards the atomic transition by applying a frequency correction of $\Delta\omega_i = -\alpha\delta\phi^e/T_i$ to the LO where α sets the strength of the feedback loop and T_i is the Ramsey time of the i'th ensemble.

The first ensemble is operated with free evolution time T_1 and we assume that the second ensemble is operated with free evolution time $T_2 = nT_1$ where n is an integer. Assuming that negligible time is spent on everything but the free evolution periods T_1 and T_2 the frequency offset of the LO between time $t_{k-1} = (k-1)T_1$ and $t_k = kT_1$ is

$$\delta\omega(t) = \delta\omega_0(t) + \Delta\omega_1(t_{k-1}) + \Delta\omega_2(t_{sn}), \tag{1}$$

where $\delta\omega_0(t)$ is the frequency fluctuation of the unlocked LO, $\Delta\omega_1(t_{k-1})$ is the sum of the frequency corrections applied up to time t_{k-1} from the first ensemble and $\Delta\omega_2(t_{sn})$ is the sum of the frequency corrections applied up to time t_{sn} from the second ensemble (s is found by rounding $(k-1)/n$ down to the nearest integer). The iterative equations for $\Delta\omega_1(t_{k-1})$ and $\Delta\omega_2(t_{sn})$ are then

$$\Delta\omega_1(t_{k-1}) = \Delta\omega_1(t_{k-2}) - \alpha\delta\phi^{e_1}(t_{k-1})/T_1 \tag{2}$$

$$\Delta\omega_2(t_{sn}) = \Delta\omega_2(t_{(s-1)n}) - \alpha\delta\phi^{e_2}(t_{sn})/T_2, \tag{3}$$

where $\delta\phi^{e_1}(t_{k-1})$ and $\delta\phi^{e_2}(t_{sn})$ are the estimated phases from the first and second ensemble at times t_{k-1} and t_{sn} respectively. Using Eq. (1) we can write the phase of the LO relative to the atoms of the second ensemble just before the measurement at time t_{sn} as

$$\begin{aligned}\delta\phi_2(t_{sn}) &= \int_0^{T_2} \delta\omega(t_{sn}-t')\mathrm{d}t' \\ &= \Delta\phi^{(2)}_{(s-1)n} + \delta\tilde{\phi}(t_{sn})\end{aligned} \tag{4}$$

where $\Delta\phi^{(2)}_{(s-1)n} = \int_0^{T_2} \Delta\omega_2(t_{(s-1)n})\mathrm{d}t'$ is the accumulated phase due to the feedback of the second ensemble and

$$\begin{aligned}\delta\tilde{\phi}(t_{sn}) &= \int_0^{T_2} \delta\tilde{\omega}(t_{sn}-t')\mathrm{d}t' \\ &= \int_0^{T_2} \delta\omega_0(t_{sn}-t') + \Delta\omega_1(t_{(s-1)n}-t')\mathrm{d}t'\end{aligned} \tag{5}$$

is the accumulated phase due to the frequency oscillations of the LO when locked by the feedback of the first ensemble. For now we assume that $T_2 \gg T_1$ such that the feedback of the first ensemble has stabilized the LO but later we will relax this assumption. From Eqs. (3)-(4) we then derive the difference equation

$$\begin{aligned}\delta\phi_2(t_{sn}) - \delta\phi_2(t_{(s-1)n}) = \delta\tilde{\phi}(t_{sn}) - \tilde{\phi}(t_{(s-1)n}) \\ -\alpha\delta\phi^{e_2}(t_{(s-1)n}).\end{aligned} \tag{6}$$

From this expression we see that the evolution of the second phase $\delta\phi_2$ is essentially driven by the noise of the stabilized LO from the first step $\delta\tilde{\phi}$ but is stabilized by the second feedback loop described by $\alpha\delta\phi^{e_2}$.

To solve Eq. (6) we need to characterize the width of the noise of the stabilized LO from the first stage, $\langle \delta\tilde{\phi}^2 \rangle = \int_0^{T_2}\mathrm{d}t \int_0^{T_2}\mathrm{d}t' \langle \delta\tilde{\omega}(t)\delta\tilde{\omega}(t') \rangle$. From Eq. (2) and (5) we can derive a difference equation for $\delta\tilde{\phi}'(t_i) = \int_0^{T_1} \delta\tilde{\omega}(t_i - t')\mathrm{d}t'$, which is the acquired phase of the LO relative to the first ensemble between time t_{i-1} and t_i (we can neglect the feedback of the second ensemble since $T_2 \gg T_1$):

$$\begin{aligned}\delta\tilde{\phi}'(t_i) - \delta\tilde{\phi}'(t_{i-1}) = \delta\phi_0(t_i) - \delta\phi_0(t_{i-1}) \\ -\alpha\delta\phi^{e_1}(t_{i-1}).\end{aligned} \tag{7}$$

Here $\delta\phi_0(t_i) = \int_0^{T_1} \delta\omega_0(t_i - t')\mathrm{d}t'$ is the phase of the unlocked LO and $t_{(s-1)n} < t_i < t_{sn}$. To solve this equation we follow Ref. [23] where the locking of the LO to a single ensemble is described. Considering for now a LO subject to white noise we write $\delta\tilde{\phi}'(t) \approx \delta\tilde{\omega}(t)T_1 = x_1(t)$ and $\delta\phi_0(t) \approx \delta\omega_0(t)T_1 = \epsilon_1 z_1(t)$ where $\epsilon_1^2 = \gamma T_1$ and $\langle z_1(t)z_1(t') \rangle = T_1\delta(t-t')$. Here γ is a parameter characterizing the frequency fluctuations of the unlocked LO and $\delta(t-t')$ is a delta like function with width T_1 such that $T_1\delta(0) = 1$. We assume that $N \gg 1$ and that we can treat $\hat{J}_x, \hat{J}_y, \hat{J}_z$ as Gaussian variables. This enables us to derive a differential equation from Eq. (7) of the form:

$$\begin{aligned}\dot{x}_1(t) = \epsilon_1\dot{z}(t) - \alpha\arcsin(K(1+\epsilon_3 z_3(t))\sin(x_1(t)) \\ +K\epsilon_2\cos(x_1(t))),\end{aligned} \tag{8}$$

where we have introduced two additional noise fields z_2, z_3 fulfilling $\langle z_i(t)z_j(t') \rangle = \delta_{i,j}T_1\delta(t-t')$ to describe the atomic noise. $\delta_{i,j}$ is the Kronecker delta, $K = \langle \hat{J}_z \rangle/J$, $\epsilon_2 = \Delta J_y/\langle \hat{J}_z \rangle$, and $\epsilon_3 = \Delta J_z/\langle \hat{J}_z \rangle$. Note that we have here used $\delta\phi^{e_1} = -\arcsin(\hat{J}_3/J)$. After expanding the arcsin function to third order it is straight forward to solve Eq. (8) and get an expression for $\langle x_1(t)x_1(t')\rangle$. Inserting this in the expression for $\langle\delta\tilde{\phi}^2\rangle$ gives

$$\begin{aligned}\langle\delta\tilde{\phi}^2\rangle = \gamma(&\gamma^2T_1^2(1-K)^2(1/6-\chi+4/9\chi^2)\\ &+\epsilon_2^2/(\gamma T_1)+\epsilon_3^2(1-\chi))T_2,\end{aligned} \tag{9}$$

where $\chi = \frac{1}{2}\alpha\langle\hat{J}_z\rangle/J$. For atoms starting out in a coherent spin state $K = 1, \Delta J_z = 0$ and $\Delta J_y/\langle\hat{J}_z\rangle = 1/\sqrt{N}$. In this case we find that the width of the noise of the stabilized LO from the first ensemble is $\langle\delta\tilde{\phi}^2\rangle = T_2/NT_1 = \tilde{\gamma}T_2$. Furthermore this noise will have a white spectrum for both white and $1/f$ noise in the unlocked LO (see Fig. 1(b) and Ref. [23]). The second ensemble thus sees an effective white noise spectrum of the LO with $\tilde{\gamma} = 1/(T_1N)$.

We now return to Eq. (6). In line with the above arguments we define $\delta\phi_2 \sim \delta\omega(t)T_2 = x_2(t)$ and $\delta\tilde{\phi}(t) \sim \delta\tilde{\omega}(t)T_2 = \tilde{\epsilon}_1\tilde{z}_1(t)$ where $\tilde{\epsilon}_1^2 = \tilde{\gamma}T_2$ and $\langle\tilde{z}_1(t)\tilde{z}_1(t')\rangle = T_2\delta(t-t')$ $(T_2\delta(0) = 1)$. The stability of the clock after running for a time $\tau \gg T_2$ is then

$$\begin{aligned}\sigma_\gamma(\tau) &= \langle(\delta\bar{\omega}(\tau)/\omega)^2\rangle^{1/2}\\ &= \frac{1}{\omega\tau T_2}\left(\int_0^\tau \mathrm{d}t\int_0^\tau \mathrm{d}t'\langle x_2(t)x_2(t')\rangle\right)^{1/2},\end{aligned} \tag{10}$$

where $\delta\bar{\omega}(\tau)$ is the mean frequency offset and ω is the frequency of the atomic transition. Following similar arguments as before we can derive and solve a differential equation similar to Eq. (8) for $x_2(t)$ and obtain an expression for $\langle x_2(t)x_2(t')\rangle$. Inserting this into Eq. (10) and taking the limit of $\tau \gg T_2$ results in

$$\sigma_\gamma(\tau) = \frac{1}{\omega_0}\sqrt{\frac{1}{\tau NT_2}}. \tag{11}$$

Eq. (11) describes how the stability improves with T_2 and N. The longest T_2 we can allow is determined by how well the LO is stabilized by the first ensemble as contained in $\tilde{\gamma}$ and we parametrize it by $T_{2,max} = \beta_2/\tilde{\gamma}$. In a similar fashion we assume that $T_{1,max} = \beta_1/\gamma$ for the first ensemble. With these parameterizations we can express the stability as

$$\sigma_\gamma(\tau) = \frac{1}{\omega}\sqrt{\frac{\gamma}{\tau N^2\beta_1\beta_2}} = \frac{1}{\omega}\sqrt{\frac{\gamma\beta_1/\beta_2}{\tau(N\gamma T_1)^2}}. \tag{12}$$

Note that with the assumption of white noise in the unlocked LO we can pick $\beta_1 = \beta_2$. As previously noted the noise of the LO will also be approximately white with $\tilde{\gamma} \sim 1/NT_1$ after locking it to the first ensemble also for other types of noise e.g. $1/f$ noise. In that case it is desirable to have $\beta_2 \neq \beta_1$ but we still expect β_1/β_2 to be of the order unity. Eq. (12) shows that by locking the LO to two ensembles of uncorrelated atoms the stability can be significantly improved from the performance obtainable by locking the LO to only a single ensemble. If $N\gamma T_1 \gg 1$ the stability obtained from Eq. (12) is much lower than the single ensemble result in Eq. (11) (with $T_2 \to T_1$) and we have an improved stability. The arguments leading to Eq. (12) can be generalized in a straight forward way to show that if the LO is locked to m ensembles of N atoms the stability of the clock is $\sigma_\gamma(\tau) = \sqrt{(\beta_1/\beta_2)^{(m-1)}\gamma/(\omega^2\tau)}(N\gamma T_1)^{-m/2}$ (since the noise of the LO is white after locking it to the first ensemble we use $\beta_2 = \beta_3 = \ldots = \beta_m$). By continuing the procedure we thus improve the stability exponentially!

In our analytical calculations above we have assumed $N \gg 1$. To investigate the performance for smaller N we have simulated an atomic clock locked to between 1 and 4 atomic ensembles each with atom numbers from $N = 20$ to 100. From the simulations we can generalize to the case where the LO is locked to m ensembles. We simulate the full quantum evolution of the atomic state through the Ramsey sequences and subsequent measurements and implement the feedback on the LO similar to the description in Eq. (1) and above. The assumption of $T_2 \gg T_1$ can be relaxed by applying a phase correction in the measurement of the ensembles (see supplemental material). The lowest number of atoms for which the protocol works is then $N_{min} \sim 2/(\gamma T_1)$ since we need each feedback to lower the noise by at least a factor of 2 to allow twice the Ramsey period at the next level. Increasing T_1 will thus both improve the stability of the clock and lower the number of atoms needed for the scheme to work. Increasing T_1 will, however, also increase the width of the noise of the unlocked LO, e.g. for white noise the width of the noise $\langle\delta\phi_0^2\rangle$ of the unlocked LO is $\langle\delta\phi_0^2\rangle = \beta_1$. For experiments or simulations running with a fixed Ramsey time there is always a finite probability that phase jumps large enough to spoil the measurement strategy occurs since Ramsey spectroscopy with projective measurements is only effective for phases $\lesssim \pi/2$. In our simulations we see these phase jumps as an abrupt break down as we increase the Ramsey time T_1. Simulating a clock with $l = 10^6$ results in a maximal T_1 of $\beta_1 \sim 0.1$. This means that the scheme of locking the LO to several ensembles will only work for $N \gtrsim 20$. Ideally we should include correction strategies for the errors that limits T_1 but for simplicity we ignore this. This means that our simulations have a weak (logarithmic) dependence on the number of steps that we simulate, which we do not expect to change our results significantly [22].

We have simulated clocks with an unlocked LO subject to both white and $1/f$ noise. The noise spectrum of the unlocked LO is defined as $S(f)\delta(f+f') = \langle\delta\omega(f)\delta\omega(f')\rangle$ where $\delta\omega(f)$ is the Fourier transform of the frequency fluctuations $\delta\omega(t)$ of the LO. For a free running LO with white noise we use $S(f) = \gamma$ while for 1/f noise we use $S(f) = \gamma^2/f$. The stability of the clocks is plotted against the ensemble size N in Fig. 2. Fig. 2 shows that the scheme works down to atom numbers of $N = 20$ where we gain a factor of $\sim 2^{m-1}$ in $\sigma_\gamma^2(\tau)$ by locking the LO to m ensembles instead of one. This result holds

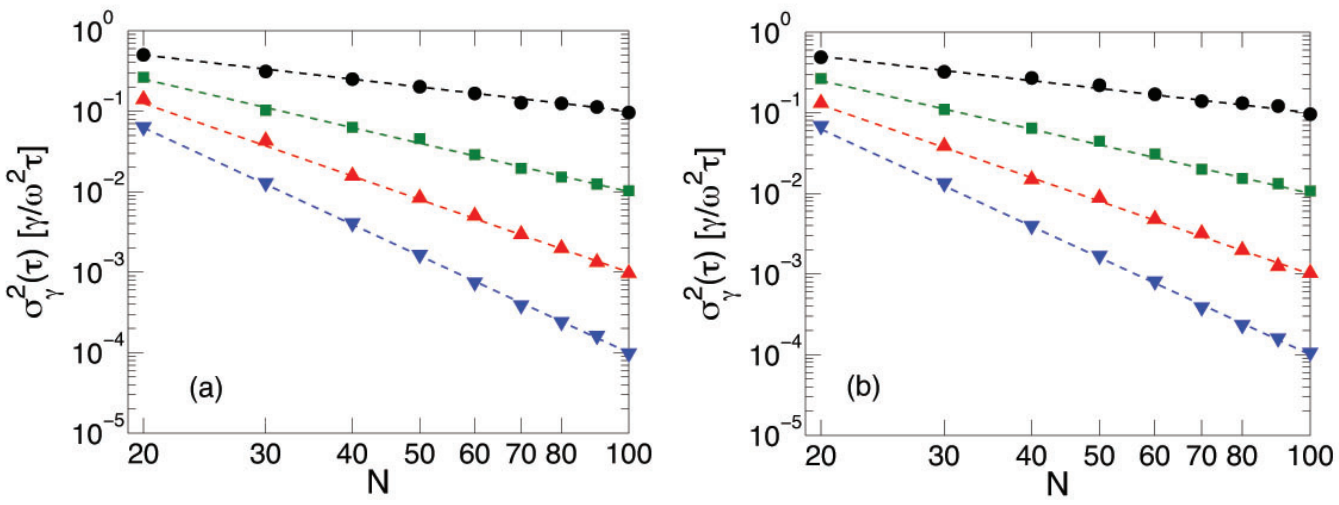

FIG. 2. (Colour online) The stability of atomic clocks for a LO subject to (a) white noise and (b) $1/f$-noise. ●, ■, ▲ and ▼ is the stability of a clock with the LO locked to 1,2,3 and 4 ensembles containing N atoms each. The clocks were simulated with $\beta_1 = 0.1$ and $T_j = nT_{j-1}$ where $n = 0.1N$ for $j > 1$. The dashed lines are the analytical calculations.

for both an unlocked LO subject to white noise and $1/f$ noise. Furthermore the numerical results are seen to agree nicely with the analytical calculations.

The conventional Ramsey protocol considered so far has a lower limit of $N_{min} \sim 20$ in order for the scheme of locking the LO to several ensembles to improve the stability. This limit is due to the conventional protocols inability to effectively resolve the phase of the LO relative to the atoms for phases $> \pi/2$. In Ref. [22] we presented an adaptive protocol for estimating the phase, which effectively resolves phases $\lesssim \pi$. For a clock running with $l = 10^6$ this protocol enables us to extend the Ramsey time to $\beta_1 \sim 0.3$ if the phase fluctuations of the unlocked LO have a white spectrum and to $\beta_1 \sim 0.2$ if the phase fluctuations have a $1/f$ spectrum. The basic idea behind the adaptive protocol is to use a series of n weak measurements with intermediate feedback to rotate the atomic state to be almost in phase with the LO. The final estimate of the drifted phase is then the sum of the n rotations. Due to the rotations the protocol is able to distinguish whether the phase lies in the intervals $[0;\pi/2]$ or $[\pi/2;\pi]$ and thus avoids the ambiguity between these intervals in the conventional protocol. We assume that the weak measurements are performed according to the strategy developed and demonstrated in Ref. [9, 10, 24] where a light field dispersively interact with the atomic spin and is subsequently measured. With this adaptive measurement strategy we simulate clocks locked to between 1 and 4 ensembles for atom numbers from $N = 7$ to 34 with an unlocked LO subject to both white and $1/f$ noise. The stability of the clocks is plotted against the ensemble size N in Fig. 3. For the adaptive protocol we can apply the scheme of locking to several ensembles down to ensemble sizes of $N = 7$ where we gain a factor of $\sim 2^{m-1}$ in $\sigma^2_\gamma(\tau)$ by locking the LO to m ensembles instead of a single ensemble. This limit holds for an unlocked LO subject to both white and $1/f$ noise even though β_1 needs to be a bit smaller for $1/f$ noise than for white noise. This is because the feedback of the first ensemble effectively reduces the noise of the LO to approximately the same level as for a LO with white noise operated with $\beta_1 \sim 0.2$. We can thus allow for $\beta \sim 0.3$ in the later ensembles since the noise of the stabilized oscillator is white. This means that the minimum ensemble size for which the scheme works is the same for $1/f$ noise and white noise in the unlocked LO.

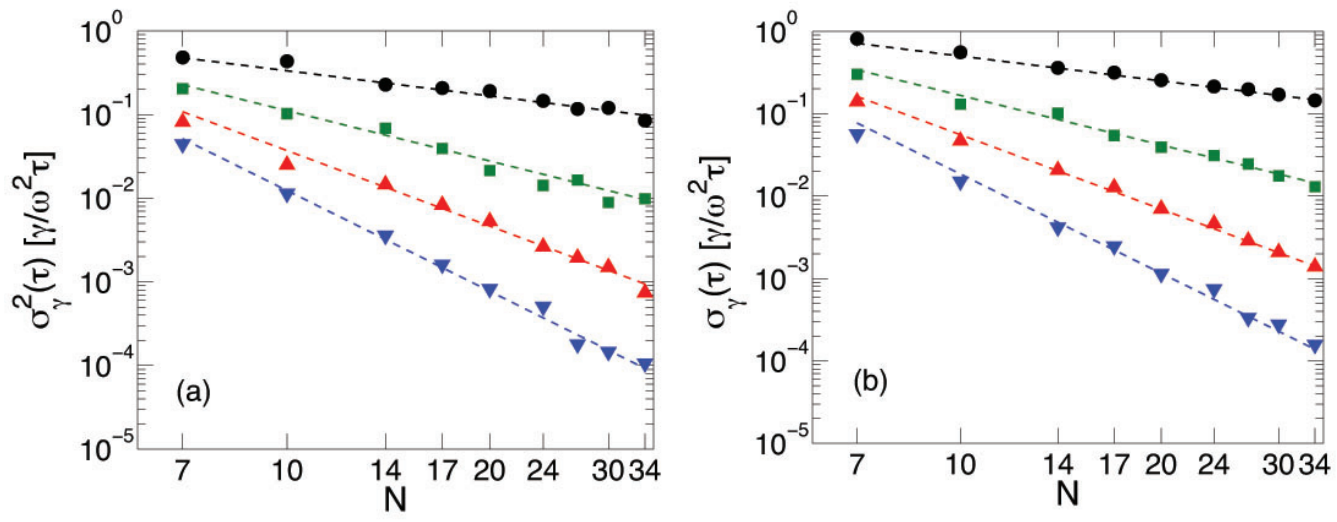

FIG. 3. (Colour online) The stability of atomic clocks with adaptive measurements [22] for a LO subject to (a) white noise and (b) $1/f$-noise.●, ■, ▲ and ▼ is the stability of a clock with the LO locked to a 1,2,3 and 4 ensembles of N atoms each. The clocks were simulated with the adaptive protocol of Ref. [22] that allows for $\beta_1 = 0.3$ (a) and $\beta_1 = 0.2$ (b). For both noise types $T_j = nT_{j-1}$ with $n = 0.3N$ for $j > 1$. The dashed lines are the analytical calculations.

In conclusion we have demonstrated a scheme for locking the LO in an atomic clock to m ensembles of N atoms each. For this scheme the stability of the clock scales as $\sqrt{\gamma}(\gamma T_1 N)^{-m/2}$ where T_1 is the Ramsey time of the first ensemble. Our scheme thus provide an exponential improvement in the stability with the number of atoms. For the conventional Ramsey protocol our scheme is applicable down to ensemble sizes of $N = 20$ atoms while it is applicable down to ensemble sizes of $N = 7$ for the adaptive protocol considered in Ref. [22]. This make the scheme relevant for atomic clocks with trapped ions if the adaptive protocol can be implemented efficiently. An interesting continuation of this work is to investigate other adaptive measurements protocols, which might be easier to implement on trapped ions. Furthermore the performance of the protocol can most likely be enhanced by considering squeezed states but the treatment of this is beyond the scope of this article.

During the final stage of our work a highly related preprint appeared, which treats essentially the same locking scheme [25]. In that paper a different measurement procedure, different atomic states as well as dynamical decoupling is considered. Furthermore the upper limit to the Ramsey time is also viewed from a different perspective. Taking this into account our results for the conventional Ramsey clock is more or less consistent with theirs but with the adaptive protocol we extend the applicability of the scheme to ensembles of only 7 atoms.

We gratefully acknowledge the support of the Lundbeck Foundation, QUANTOP and the Danish National

Research Foundation. The research leading to these results has received funding from the European Research Council under the European Union's Seventh Framework Programme (FP/2007-2013) / ERC Grant Agreement n. 306576. We also thank D. Wineland, A. André and M. Lukin for helpful discussions.

[1] G. Santarelli, P. Laurent, P. Lemonde, A. Clairon, A. G. Mann, S. Chang, A. N. Luiten, and C. Salomon, Phys. Rev. Lett. **82**, 4619 (1999).

[2] W. M. Itano, J. C. Bergquist, J. J. Bollinger, J. M. Gilligan, D. J. Heinzen, F. L. Moore, M. G. Raizen, and D. J. Wineland, Phys Rev. A **47**, 3554 (1993).

[3] D. J. Wineland, J. J. Bollinger, W. M. Itano, and D. J. Heinzen, Phys Rev. A **50**, 67 (1994).

[4] J. J. Bollinger, W. M. Itano, D. J. Wineland, and D. J. Heinzen, Phys Rev. A **54**, R4649 (1996).

[5] A. André, A. S. Sørensen, and M. D. Lukin, Phys. Rev. Lett. **92**, 230801 (2004).

[6] V. Giovannetti, S. Lloyd, and L. Maccone, Nature Photonics **5**, 222 (2011).

[7] D. Leibfried, M. D. Barrett, T. Schaetz, J. Britton, J. Chiaverini, W. M. Itano, J. D. Jost, C. Langer, and D. J. Wineland, Science **304**, 1476 (2004).

[8] I. D. Leroux, M. H. Schleier-Smith, and V. Vuletić, Phys. Rev. Lett. **104**, 073602 (2010).

[9] J. Appel, P. J. Windpassinger, D. Oblak, U. B. Hoff, N. Kjærgaard, and E. S. Polzik, Proceedings of the National Academy of Sciences **106**, 10960 (2009).

[10] A. Louchet-Chauvet, J. Appel, J. J. Renema, D. Oblak, N. Kjaergaard, and E. S. Polzik, New Journal of Physics **12**, 065032 (2010).

[11] M. F. Riedel, P. Böhi, Y. Li, T. W. Hänsch, A. Sinatra, and P. Treutlein, Nature **464**, 1170 (2010).

[12] C. Gross, T. Zibold, E. Nicklas, J. Esteve, and M. K. Oberthaler, Nature **464**, 1165 (2010).

[13] S. A. Diddams, T. Udem, J. C. Bergquist, E. A. Curtis, R. E. Drullinger, L. Hollberg, W. M. Itano, W. D. Lee, C. W. Oates, K. R. Vogel, and D. J. Wineland, Science **293**, 825 (2001).

[14] T. Udem, R. Holzwarth, and T. W. Hänsch, Nature **416**, 233 (2002).

[15] H. S. Margolis, H. S. Barwood, H. S. Huang, H. S. Klein, S. N. Lea, K. Szymaniec, and P. Gill, Science **306**, 1355 (2004).

[16] F.-L. Takamoto, F.-L. Hong, R. Higashi, and H. Katori, Nature **435**, 321 (2005).

[17] T. Rosenband, D. B. Hume, P. O. Schmidt, C. W. Chou, A. Brusch, L. Lorini, W. H. Oskay, R. E. Drullinger, T. M. Fortier, J. E. Stalnaker, S. A. Diddams, W. C. Swann, N. R. Newbury, W. M. Itano, D. J. Wineland, and J. C. Bergquist, Science **319**, 1808 (2008).

[18] N. F. Ramsey, *Molecular Beams* (Oxford University Press, London, 1956).

[19] D. J. Berkeland, J. D. Miller, J. C. Bergquist, W. M. Itano, and D. J. Wineland, Phys. Rev. Lett. **80**, 2089 (1998).

[20] D. J. Wineland, C. Monroe, W. M. Itano, D. Leibfried, B. E. King, and D. M. Meekhof, J. Res. Natl. Inst. Stand. Technol. **103**, 259 (1998).

[21] P. Laurent, P. Lemonde, E. Simon, G. Santarelli, A. Clairon, N. Dimarcq, P. Petit, C. Audoin, and C. Salomon, The European Physical Journal D **3**, 201 (1998).

[22] J. Borregaard and A. S. Sørensen, arXiv:1304.2288 [quant-ph] (2013).

[23] A. André, *Nonclassical states of light and atomic ensembles: Generation and New Applications*, Ph.D. thesis, Harvard Univeristy, Cambridge Massachusetts (2005).

[24] J. L. Sørensen, J. Hald, and E. S. Polzik, Phys. Rev. Lett. **80**, 13487 (1998).

[25] T. Rosenband and D. R. Leibrandt, arXiv:1303.6357 [quant-ph] (2013).

SUPPLEMENTAL MATERIAL: EFFICIENT ATOMIC CLOCKS OPERATED WITH SEVERAL ATOMIC ENSEMBLES

This supplemental material to our article "Efficient atomic clocks operated with several atomic ensembles" describes the details of our numerical simulations of atomic clocks locked to several atomic ensembles. We show how the assumption of $T_2 \gg T_1$ made in the article can be relaxed by applying a phase correction in the measurement of the second ensemble. We do this for the general case of locking the LO to m-ensembles.

PHASE CORRECTIONS

The Ramsey sequence and the subsequent estimate of the drifted phase of the LO relative to an ensemble of atoms is described in the article. Eq. (1) - (3) in the article describes the frequency offset of the LO ($\delta\omega(t)$) between time $t_{k-1} = (k-1)T$ and $t_k = kT$ when the LO is locked to two ensembles. We will now generalize this formalism to the case where the LO is locked to m ensembles. Assuming that the j'th ensemble is operated with Ramsey time $T_j = n^{j-1}T_1$ (n is an integer describing how many times the Ramsey time can be increased for each added ensemble) the frequency offset of the LO between time $t_{k-1} = (k-1)T_1$ and $t_k = kT_1$ is

$$\delta\omega(t) = \delta\omega_0(t) + \Delta\omega_1(t_{s_1}) + \Delta\omega_2(t_{s_2 n}) + \ldots + \Delta\omega_m(t_{s_m n^{m-1}}), \tag{13}$$

where $\delta\omega_0(t_k)$ is the frequency fluctuations of the unlocked LO and $\Delta\omega_m(t_{s_j n^{j-1}})$ is the sum of the frequency corrections applied up to time $t_{s_j n^{j-1}}$ from the j'th ensemble (s_j is found by rounding $(k-1)/n^{j-1}$ down to the nearest integer). Note that the index $s_j n^{j-1}$ should be read as s_j times n^{j-1} describing the exponential increase in the Ramsey time each time another ensemble is used. The iterative equation for $\Delta\omega_j(t_{s_j n^{j-1}})$ is

$$\Delta\omega_j(t_{s_j n^{j-1}}) = \Delta\omega_j(t_{(s_j-1)n^{j-1}}) - \alpha\delta\phi^{e_j}(t_{s_j n^{j-1}})/T_j, \tag{14}$$

where $\delta\phi^{e_j}(t_{s_j n^{j-1}})$ is the estimated phase from the j'th ensemble at time $t_{s_j n^{j-1}}$ and α sets the strength of the feedback loop (we assume equal strengths for all feedback loops). α determines how long time the clocks needs to run before the LO is effectively locked by the feedbacks. In the article we assumed that $T_2 \gg T_1$ such that the feedback of the first ensemble had effectively locked the LO before the measurement of the second ensemble. In the general setup of locking the LO to m ensembles this corresponds to assuming that $n \gg 1$. We will now show how we can apply a phase correction in the measurement of the j'th ensemble such we can relax this assumption. The phase correction will compensate for the fact that the information from the last measurements on the first $(j-1)$ ensembles has not been fully exploited by the feedback loops before the measurement of the j'th ensemble.

The phase of the LO relative to the j'th ensemble just before the measurement at time $t_{s_j n^{j-1}}$ is

$$\Phi^j_{s_j n^{j-1}} = \sum_{s=1}^{n^{j-1}} \phi_{s+(s_j-1)n^{j-1}} - \Phi^{\text{correct } j}_{s_j n^{j-1}}, \tag{15}$$

where $\phi_{s+(s_j-1)n^{j-1}} = \int_0^{T_1} \delta\omega(t_{s+(s_j-1)n^{j-1}} - t')\mathrm{d}t'$ and $\Phi^{\text{correct } j}_{s_j n^{j-1}}$ is the phase correction applied in the measurement of the j'th ensemble at time $t_{s_j n^{j-1}}$. Using Eq. (13)-(14) we can write

$$\begin{aligned}\Phi^j_{s_j n^{j-1}} = {} & \sum_{s=1}^{n^{j-1}} \Big(\delta\phi_{s+(s_j-1)n^{j-1}} - \alpha\sum_{s'=1}^{s-1} \phi^{e_1}_{s'+(s_j-1)n^{j-1}}\Big) - \alpha\sum_{s=2}^{n^{j-2}}\sum_{s'=1}^{s-1} \delta\phi^{e_2}_{s'n+(s_j-1)n^{j-1}} - \ldots \\ & -\alpha\sum_{s=2}^{n}\sum_{s'=1}^{s-1} \delta\phi^{e_{j-1}}_{s'n^{j-1}+(s_j-1)n^{j-1}} - \Phi^{\text{correct } j}_{s_j n^{j-1}},\end{aligned} \tag{16}$$

where $\delta\phi_{s+(s_j-1)n^{j-1}}$ is the accumulated phase between time $t_{(s_j-1)n^{j-1}+s-1}$ and $t_{(s_j-1)n^{j-1}+s}$ due to the frequency fluctuations of the unlocked LO and the feedback corrections applied up to time $t_{(s_j-1)n^{j-1}}$. For simplicity we have replaced the time dependence by an index such that $\delta\phi^{e_i}_{s'n^{i-1}+(s_j-1)n^{j-1}}$ is the phase estimate from the i'th ensemble at time $t_{s'n^{i-1}+(s_j-1)n^{j-1}}$. To fully exploit all information from the measurements on the first $(j-1)$ ensembles between time $t_{(s_j-1)n^{j-1}}$ and $t_{s_j n^{j-1}}$, we choose a phase correction of $\Phi^{\text{correct } j}_{s_j n^{j-1}} = \phi^{\text{correct}}_{j,1} + \phi\text{correct}_{j,2} + \ldots + \phi^{\text{correct}}_{j,j-1}$ where

$$\phi\text{correct}_{j,i} = \sum_{s=1}^{n^{j-i}} (1-\alpha)^{n^{j-i}-s} \delta\phi^{e_i}_{sn^{i-1}+(s_j-1)n^{j-1}} + \alpha\sum_{s'=1}^{s-1} (1-\alpha)^{n^{j-i}-s} \delta\phi^{e_i}_{s'n^{i-1}+(s_j-1)n^{j-1}} \tag{17}$$

For this choice of $\Phi^{\text{correct } j}_{s_j n^{j-1}}$ the phase of the LO relative to ensemble j is

$$\Phi^{j}_{s_j n^{j-1}} = \sum_{s=1}^{n^{j-1}} \phi_{s+(s_j-1)n^{j-1}} - \sum_{s=1}^{n^{j-1}} \delta\phi^{e_1}_{s+(s_j-1)n^{j-1}} - \sum_{s=1}^{n^{j-2}} \delta\phi^{e_2}_{sn+(s_j-1)n^{j-1}} - \ldots - \sum_{s=1}^{n} \delta\phi^{e_{j-1}}_{sn^{j-1}+(s_j-1)n^{j-1}}, \tag{18}$$

where $\phi_{s+(s_j-1)n^{j-1}} = \int_0^{T_1} \delta\omega(t_{s+(s_j-1)n^{j-1}} - t')\mathrm{d}t'$ is the accumulated phase of the LO relative to the atoms in the first ensemble between times $t_{s-1+(s_j-1)n^{j-1}}$ and $t_{s+(s_j-1)n^{j-1}}$. According to Eq. (18), $\Phi^{j}_{s_j n^{j-1}}$ is effectively the accumulated errors between the estimated phases and the actual phases for the $(j-1)$'th ensemble between times $t_{(s_j-1)n^{j-1}}$ and $t_{s_j n^{j-1}}$ (this is seen by considering Eq. (18) for $j = 1, 2, \ldots$). $\Phi^{j}_{s_j n^{j-1}}$ is thus the accumulated phase of the LO between time $t_{(s_j-1)n^{j-1}}$ and $t_{s_j n^{j-1}}$ when it is fully stabilized by the feedbacks of the first $(j-1)$ ensembles. With the phase corrections $\Phi^{\text{correct } j}_{s_j n^{j-1}}$ we can therefore relax the assumption of $n \gg 1$. As opposed to the feedback loop, which correct for e.g. frequency drifts by changing the frequency of the LO, the phase corrections directly correct the phase. This phase locking ensures a more rapid convergence, which is important when we want to apply the LO to the subsequent ensembles. Since the noise of the LO is white after stabilizing it to the first ensemble the subsequent frequency corrections from the other ensembles could be replaced with merely phase corrections of the LO, which would simplify the above procedure of applying a phase correction in the measurement of the j'th ensemble. We have however chosen to consider frequency corrections to keep a consistent treatment of the feedback in all stages.

In our simulations we are simulating a clock with a LO locked to m ensembles running for a long but finite time. Similar to our description of the phase corrections $\Phi^{\text{correct } j}_{s_j n^{j-1}}$ above there will be some remaining information from the last measurements, which have not been fully exploited by the feedback loops when our simulation stops. In our simulations we therefore do an additional phase correction $\Phi^{\text{correct}}_{\text{final}}$ to the LO after the final measurement. In principle the influence of the last few measurements could also have been reduced by running the simulation for a longer time but by doing the phase correction we reduce the required simulation time. With the phase correction the mean frequency offset of the LO ($\bar{\omega}(\tau)$) after running the clock for a total time of $\tau = lT_1$ is

$$\bar{\omega}(\tau) = \frac{1}{\tau} \sum_{s}^{l} \phi_s - \Phi^{\text{correct}}_{\text{final}}, \tag{19}$$

where $\phi_s = \int_0^{T_1} \delta\omega(t_s - t')\mathrm{d}t'$ is the phase of the LO relative to the atoms at time t_s and $\Phi^{\text{correct}}_{\text{final}}$ is the final phase correction of the LO. Using Eq. (13)-(14) and assuming that the j'th ensemble is operated with Ramsey time $T_j = n^{j-1}T_1$ we can write $\bar{\omega}(\tau)$ as:

$$\bar{\omega}(\tau) = \frac{1}{\tau}\left[\sum_{s=1}^{l}(\delta\phi^0_s - \alpha\sum_{s'=1}^{s-1}\phi^{e_1}_{s'}) - \alpha\sum_{s=1}^{l/n}\sum_{s'=1}^{s-1}\delta\phi^{e_2}_{s'n} - \ldots - \alpha\sum_{s=1}^{l/n^{m-1}}\sum_{s'=1}^{s-1}\delta\phi^{e_m}_{s'n^{m-1}} - \Phi^{\text{correct}}_{\text{final}}\right] \tag{20}$$

where $\delta\phi^0_s$ is the accumulated phase between time t_{s-1} and t_s due to the frequency fluctuations of the unlocked LO and $\delta\phi^{e_j}_{s'n^{j-1}}$ is the estimated phase from the j'th ensemble at time $t_{s'n^{j-1}}$. We find that the ideal performance is reached with $\Phi^{\text{correct}}_{\text{final}} = \phi^{\text{correct}}_{\text{final},1} + \phi^{\text{correct}}_{\text{final},2} + \ldots + \phi^{\text{correct}}_{\text{final},m}$ where

$$\phi^{\text{correct}}_{\text{final},j} = \sum_{s=1}^{l/n^{j-1}} (1-\alpha)^{l/n^{j-1}-s}\delta\phi^{e_j}_{sn^{j-1}} + \alpha\sum_{s'=1}^{s-1}(1-\alpha)^{l/n^{j-1}-s}\delta\phi^{e_j}_{s'n^{j-1}}. \tag{21}$$

With this phase correction the mean frequency offset is

$$\bar{\omega}(\tau) = \frac{1}{\tau}\left[\sum_{s=1}^{l/n^{m-1}} \tilde{\phi}_{sn^{m-1}} - \delta\tilde{\phi}^{e_1}_{sn^{m-1}} - \delta\tilde{\phi}^{e_2}_{sn^{m-1}} - \ldots - \delta\tilde{\phi}^{e_m}_{sn^{m-1}}\right], \tag{22}$$

where $\tilde{\phi}_{sn^{m-1}} = \sum_{s'=1}^{n^{m-1}} \phi_{(s-1)n^{m-1}+s'} = \sum_{i=1}^{n^{m-1}} \int_0^{T_1} \delta\omega(t_{s'+(s_j-1)n^{m-1}} - t')\mathrm{d}t'$ is the sum of the accumulated phases of the LO relative to the first ensemble between time $t_{s'-1+(s_j-1)n^{m-1}}$ and $t_{s'+(s_j-1)n^{m-1}}$ and $\delta\tilde{\phi}^{e_j}_{sn^{m-1}} =$

$\sum_{s'=1}^{n^{m-j}} \delta\phi^{e_j}_{s'n^{j-1}+(s-1)n^{m-j}}$ is the sum of the estimated phases from the j'th ensemble at times $t_{s'n^{j-1}+(s-1)n^{m-1}}$. Using Eq. (18) we can write:

$$\bar{\omega}(\tau) = \frac{1}{\tau}\left[\sum_{s=1}^{l/n^{m-1}} \tilde{\Phi}^m_s - \phi^{e_m}_s\right] \tag{23}$$

$$= \frac{1}{l/n^{m-1}}\left[\sum_{s=1}^{l/n^{m-1}} \frac{\tilde{\Phi}^m_s - \phi^{e_m}_s}{T_m}\right], \tag{24}$$

where T_m is the Ramsey time of the m'th ensemble, $\tilde{\Phi}^m_s$ is the accumulated phase of the stabilized LO relative to the atoms in the m'th ensemble at time $t_{sn^{m-1}}$ and $\phi^{e_m}_s$ is the estimate of that phase. We use Eq. (24) to determine the stability of the clock, which is given by $\sigma_\gamma(\tau) = \langle(\delta\bar{\omega}(\tau)/\omega)^2\rangle^{1/2}$.